


DIN	DB-25	PCB	Cable colors	Signal
1	2	1	Light brown	-Strobe
2	3	3	Red	Data 0
3	5	5	Orange	Data 1
4	7	7	Yellow	Data 2
5	9	9	Green	Data 3
6	11	11	Blue	Data 4
7	13	13	Violet	Data 5
8	15	15	Gray	Data 6
9	17	17	White	Data 7
10	19	19	Red/Black	-Ack
11	21	21	Red/Yellow	Busy
12	23	23	Light green	PaperEnd
13	25	25	Light blue	SelectIn
14	2	2	Pink	-AutoFd
15	4	4	Light grey	-Error
16	6	6	White/Red	-Init
17	8	8	Violet/Black	-Select
18	10	10	Brown/Grey	Gnd
19	12	12	Red/White + Orange	Gnd
20	14	14	Green/White + Yellow	Gnd
21	16	16	Blue/White + Violet	Gnd
22	18	18	Grey/White	Gnd
23	20	20	Shield	Gnd
24	22	22	White/Black	Gnd
25	24	24	Pink/Black	Gnd
5	26	26	Black + Black/White	+5V

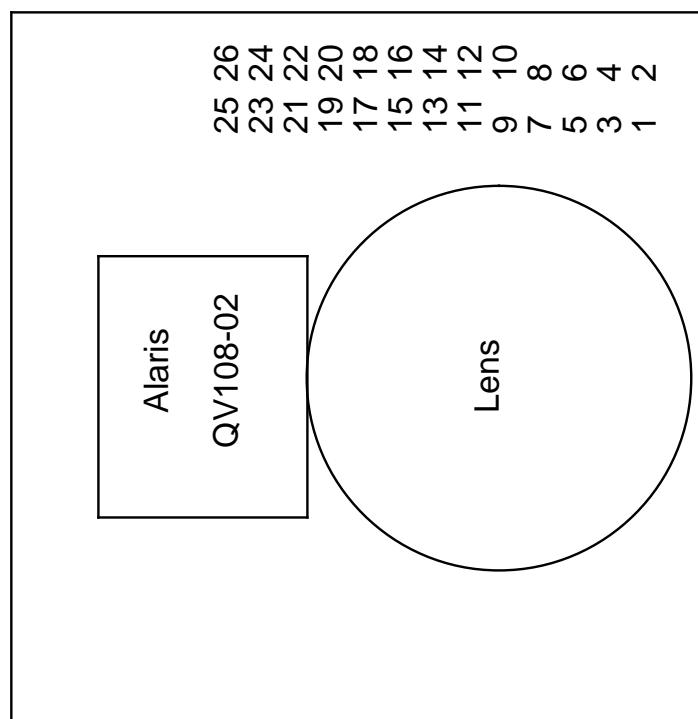

## Alaris weeCam connections

TITLE

FILE: weecam\_connx.sch

REVISION: 1

PAGE 1 OF 1 DRAWN BY: (c) John Coppens